



15-16 吨
轻型平衡重式叉车
BALANCE WEIGHT FORKLIFT





 叉车产销量连续22年 中国第一
NO.1 FORKLIFT MANUFACTURING AND SALE
IN CHINA CONTINUOUSLY FOR 22 YEARS

中国驰名商标
中国国家工商总局认证



轻型平衡重式叉车
BALANCE WEIGHT FORKLIIFT **15-16吨**

特性		Characteristic	
1.01	制造商	manufacturer	XCMG
1.02	型号	Model	CPCD150-160-Wx-06II CPCD150-160-CU-06III
1.03	载荷中心	Load Centre	mm 600
1.04	额定起重量	Rated Load Capacity	Kg 15000 16000 15000 16000
1.05	起升高度(标准)	Lifting Height(standard)	mm 3000
1.06	起升速度(空/满)	Lifting Speed(Unloaded/Loaded)	mm/s 350/330
1.07	下降速度(空/满)	Lowing Speed(Unloaded/Loaded)	mm/s 330/450
1.08	门架倾角(前/后)	Mast Tilt(fwd/bwd)	deg 6/12
1.09	行驶速度(空/满)	Traveling Speed(Unloaded/Loaded)	Km/h 28/23
1.10	最小转弯半径	Min. Turning Radius	mm 4800
1.11	最大爬坡度	Gradeability	% 25
外形		Shape	
2.01	全长(含货叉)	Overall Length(with Forks)	mm 6105
2.02	全宽	Overall Width	mm 2590
2.03	全高(门架不起升)	Overall Height(Mast)	mm 3220
2.04	轴距	Wheel Base	mm 3100
2.05	轮距(前/后)	Tread(fwd/bwd)	mm 1904/2050
2.06	最小离地间隙	Min Under clearance	mm 265
货叉		Fork	
3.01	调距范围	Lateral Fork Adjustment(Outside of Forks)	mm 490-2400
3.02	长/宽/高	Length/Width/Thickness	mm 1370/200/85
发动机		Engine	
4.01	发动机型号	Engine Manufacturer/Model	锡柴CA6110/125ZT Cummins QSB6.7
4.02	缸数/排量	Cyl. Number/Displacement	/L 6/7.127 6/6.7
4.03	额定功率/转速	Rated Power/Rated Speed	KW/rpm 117/2200 119/2200
4.04	最大扭矩/转速	Max. Torque/Rated Speed	NM/rpm 580/1500 732/1500
4.05	燃油消耗率	Fuel Consumption	g/kwh 205 205
变速箱		Gearbox	
5.01	变速箱	Gearbox	合力专用变速箱 Special gearbox for HELI
轮胎		Tire	
6.01	前轮/后轮	Front Tire/Rear Tire	12.00-20/12.00-20





* 本公司保留更改产品设计规格的权利, 恕不另行通知。
* Details of specifications and equipment are based on information available at the time of printing and may change without notice.

授权经销商 AUTHORIZED DEALER

Balance Weight Forklift
CPCD120

特性		Characteristic	
1.01	制造商	Manufacturer	HELI
1.02	型号	Model	CPCD120-Wx-06II CPCD120-CU-06III
1.03	起升重量	Load Capacity	kg 12000
1.04	载荷中心	Load Centre	mm 600
1.05	动力方式	Power Type	柴油
1.06	驾驶方式	Driving Style	座式
轮胎		Tire	
2.01	前轮	Front Tire	10.00-20
2.02	后轮	Rear Tire	10.00-20
尺寸参数		Dimension Parameter	
3.01	标准起升高度	Lifting Height(standard)	mm 3000
3.02	门架倾角 (前/后)	Mast Tilt(fwd/bwd)	6° / 12°
3.03	最小转弯半径	Min.Turning Radius	mm 4300
3.04	全长 (含货叉)	Overall Length(with Forks)	mm 4400(5770)
3.05	全宽	Overall Width	mm 2350
3.06	全高 (门架不升起)	mast without activity	mm 3170
3.07	轴距	Wheel Base	mm 2950
3.08	轮距 前/后	Tread(fwd/bwd)	mm 1724/1850
3.09	悬距 前/后	Overhang(fwd/bwd)	mm 730/720
3.10	最小离地间隙	Min.Under clearance	mm 260
3.11	货叉调距范围	Lateral Fork Adjustment(Outside of Forks)	mm 420-2200
3.12	货叉长度	Fork Length	mm 1370
3.13	货叉宽度/厚度	Fork Width/Thickness	mm 175/80
性能参数		Performance Parameter	
4.01	起升速度 (满载)	Lifting Speed(Loaded)	mm/s 350
4.02	下降速度 (满载)	Lowing Speed(Loaded)	mm/s 370
4.03	行驶速度 (满载/空载)	Traveling Speed(Loaded/Unloaded)	mm/s 27/29 25/27
4.04	最大爬坡度	Max.gradeability	% 28 25
发动机		Engine	
5.01	发动机制造厂商/型号	Engine Manufacturer/Model	/L 锡柴CA6110/125ZT 康明斯QSB4.5
5.02	缸数/排量	Cyl. Number/Displacement	kW/rpm 6/7.127 4/4.460
5.03	额定功率/转速	Rated Power/Roted Speed	Nm/rpm 117/2200 119/2200
5.04	最大扭矩/转速	Max. Torque/Roted Speed	580/1500 624/1500
变速箱		Gearbox	
6.01	变速箱	Gearbox	合力专用变速箱 special gearbox for HELI

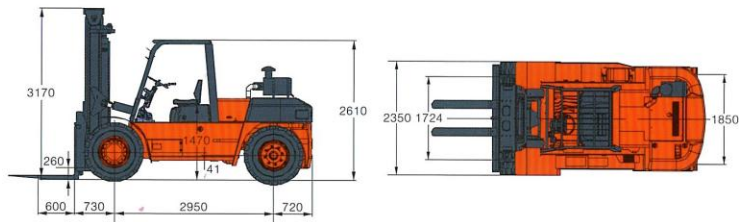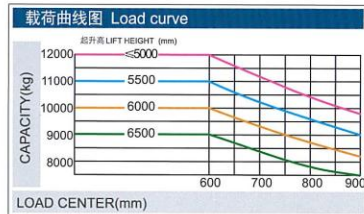

* 本公司保留更改产品设计和规格的权利，恕不另行通知。
 * Details of specifications and equipment are based on information available at time of printing and may change without notice.